

A1.
Wiring
DuctsA2.
Cable
TiesA3.
Din
RailsA4.
Cable
MarkersA5.
Cable
ClampsA6.
Wrapping
BandsA7.
Nylon
Cable GlandA8.
Metal
Cable GlandA9.
Plastic
Flexible
ConduitA10.
Metal
Flexible
ConduitA11.
TerminalA12.
Copper
Tube
TerminalsA13.
Heat
Shrinkable
TubingsA14.
Bus Bar
InsulatorsA15.
ToolA16.
Cable
ClipA17.
Insulating
NutA18.
Nylon Cable
Carrier

CE RoHS EASCO® M Type Waterproof Nylon Cable Gland (M型尼龙电缆防水接头)



Materials: Nylon PA66 + EPDM Rubber.

Working Temperature: -40°C ~ +105°C. short time +160°C

Waterproof: IP68.

Color: White, Black, Other colors upon request.

Fire Resistant: UL94-V2.


材质: 尼龙PA66+EPDM橡胶.

工作温度: -40°C至105°C, 短时可达+160°C

防水等级: IP68.

颜色: 白色, 黑色, 可定制其他颜色.

阻燃等级: UL94-V2.

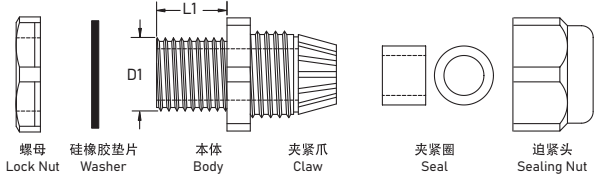


Article No.	Part No.	Cable Range 口径尺寸		Thread O.D. (D1)	Thread Length (L1)	Spanner Size	Installing Hole
货号	型号	Min Range 最小口径	Max Range 最大口径	尾部直径 (D1)	尾长 (L1)	扳手尺寸	固定孔直径
A0107.000.0001	M8X1.25	2	5	8	7.5	13/12	8~8.3
A0107.000.0002	M10X1.5	3	6	10	8	15/12	10~10.3
A0107.000.0003	M12X1.5	4	8	12	9	19/18	12~12.3
A0107.000.0004	M12X1.5	3	6.5	12	8	18/16	12~12.3
A0107.000.0005	M12X1.5	3	5.5	12	9	19/18	12~12.3
A0107.000.0006	M16X1.5	6	10	16	9	22/22	16~16.3
A0107.000.0007	M16X1.5	4	8	16	9	22/19	16~16.3
A0107.000.0008	M16X1.5	3	5.5	16	9	22/19	16~16.3
A0107.000.0009	M18X1.5	6	10	18	9	24/22	18~18.3
A0107.000.0010	M18X1.5	4	8	18	9	24/22	18~18.3
A0107.000.0011	M20X1.5	8.5	14	20	10	27/27	20~20.3
A0107.000.0012	M20X1.5	5	11	20	10	27/27	20~20.3
A0107.000.0013	M20X1.5	7	12.5	20	9	27/24	20~20.3
A0107.000.0014	M25X1.5	12.5	18	25	10	33/33	25~25.4
A0107.000.0015	M25X1.5	7	13	25	10	33/27	25~25.4
A0107.000.0016	M32X1.5	18	25	32	12	41/41	32~32.4
A0107.000.0017	M32X1.5	14	22	32	12	41/41	32~32.4
A0107.000.0018	M40X1.5	24	32	40	15	50/50	40~40.4
A0107.000.0019	M40X1.5	18	25	40	15	50/50	40~40.4
A0107.000.0020	M50X1.5	31	41	50	20	62/62	50~50.4
A0107.000.0021	M50X1.5	25	32	50	20	62/62	50~50.4
A0107.000.0022	M63X1.5	35	45	63	20	75/65	63~63.4
A0107.000.0023	M63X1.5	29	38	63	20	75/65	63~63.4

CE RoHS EASCO® ML Type Waterproof Nylon Cable Gland (ML型尼龙电缆防水接头)



Materials: Nylon PA66 + EPDM Rubber.
 Working Temperature: -40°C ~ +105°C. short time +160°C
 Waterproof: IP68.
 Color: White, Black, Other colors upon request.
 Fire Resistant: UL94-V2.
 材质: 尼龙PA66+EPDM橡胶.
 工作温度: -40°C至105°C, 短时可达+160°C
 防水等级: IP68.
 颜色: 白色, 黑色, 可定制其他颜色.
 阻燃等级: UL94-V2.

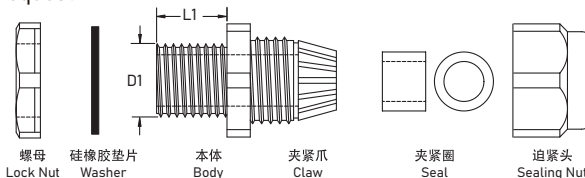


Article No.	Part No.	Cable Range 口径尺寸		Thread O.D. (D1)	Thread Length (L1)	Spanner Size	Installing Hole
货号	型号	Min Range 最小口径	Max Range 最大口径	尾部直径 (D1)	尾长 (L1)	扳手尺寸	固定孔直径
A0107.001.0001	ML12X1.5	3	6.5	12	15	18/16	12~12.3
A0107.001.0002	ML12X1.5	3	5.5	12	15	19/18	12~12.3
A0107.001.0003	ML16X1.5	4	8	16	15	22/19	16~16.3
A0107.001.0004	ML16X1.5	6	10	16	15	22/22	16~16.3
A0107.001.0005	ML16X1.5	3	5.5	16	15	22/19	16~16.3
A0107.001.0006	ML18X1.5	6	10	18	15	24/22	18~18.3
A0107.001.0007	ML18X1.5	3	7	18	15	24/19	18~18.3
A0107.001.0008	ML20X1.5	8.5	14	20	15	27/27	20~20.3
A0107.001.0009	ML20X1.5	7	12.5	20	15	27/24	20~20.3
A0107.001.0010	ML20X1.5	5	10	20	15	27/24	20~20.3
A0107.001.0011	ML25X1.5	12.5	18	25	15	33/33	25~25.4
A0107.001.0012	ML25X1.5	9	16	25	15	33/33	25~25.4
A0107.001.0013	ML32X1.5	18	25	32	15	41/41	32~32.4
A0107.001.0014	ML32X1.5	14	22	32	15	41/41	32~32.4
A0107.001.0015	ML40X1.5	24	32	40	18	50/50	40~40.4
A0107.001.0016	ML40X1.5	18	25	40	18	50/50	40~40.4
A0107.001.0017	ML50X1.5	31	41	50	20	62/62	50~50.4
A0107.001.0018	ML50X1.5	22	28	50	20	62/62	50~50.4
A0107.001.0019	ML63X1.5	35	45	63	20	75/65	63~63.4
A0107.001.0020	ML63X1.5	29	38	63	20	75/65	63~63.4

A1.
Wiring
DuctsA2.
Cable
TiesA3.
Din
RailsA4.
Cable
MarkersA5.
Cable
ClampsA6.
Wrapping
BandsA7.
Nylon
Cable GlandA8.
Metal
Cable GlandA9.
Plastic
Flexible
ConduitA10.
Metal
Flexible
ConduitA11.
TerminalA12.
Copper
Tube
TerminalsA13.
Heat
Shrinkable
TubingsA14.
Bus Bar
InsulatorsA15.
ToolA16.
Cable
ClipA17.
Insulating
NutA18.
Nylon Cable
Carrier

CE RoHS EASCO® PG Type Waterproof Nylon Cable Gland (PG型尼龙电缆防水接头)



Materials: Nylon PA66 + EPDM Rubber.
Working Temperature: -40°C ~ +105°C. short time +160°C
Waterproof: IP68.
Color: White , Black, Other colors upon request.
Fire Resistant: UL94-V2.
材质: 尼龙PA66+EPDM橡胶.
工作温度: -40°C至105°C, 短时可达+160°C
防水等级: IP68.
颜色: 白色, 黑色, 可定制其他颜色.
阻燃等级: UL94-V2.

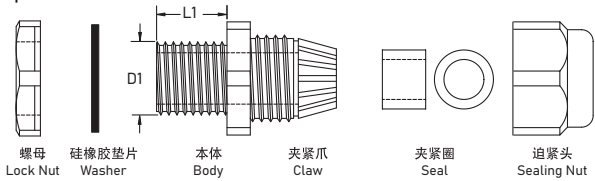


Article No.	Part No.	Cable Range 口径尺寸		Thread O.D. (D1)	Thread Length (L1)	Spanner Size	Installing Hole
货号	型号	Min Range 最小口径	Max Range 最大口径	尾部直径 (D1)	尾长 (L1)	扳手尺寸	固定孔直径
A0107.002.0001	PG7	3	6.5	12.5	8	19/15	12.5~12.8
A0107.002.0002	PG7	3	5.5	12.5	9	19/19	12.5~12.8
A0107.002.0003	PG7	4	8	12.5	9	19/19	12.5~12.8
A0107.002.0004	PG9	4	8	15.2	9	22/19	15.2~15.5
A0107.002.0005	PG9	3	5.5	15.2	9	22/19	15.2~15.5
A0107.002.0006	PG11	6	10	18.6	9	24/22	18.6~18.9
A0107.002.0007	PG11	4	7	18.6	9	24/22	18.6~18.9
A0107.002.0008	PG13.5	7	12	20.4	9	27/24	20.4~20.7
A0107.002.0009	PG13.5	5	9	20.4	9	27/24	20.4~20.7
A0107.002.0010	PG16	8.5	14	22.5	10	30/27	22.5~22.8
A0107.002.0011	PG16	7	11	22.5	10	30/27	22.5~22.8
A0107.002.0012	PG21	12	18	28.3	10	35/33	28.3~28.7
A0107.002.0013	PG21	11	16	28.3	10	35/33	28.3~28.7
A0107.002.0014	PG29	18	25	37	12	46/42	37~37.4
A0107.002.0015	PG29	16	22	37	12	46/42	37~37.4
A0107.002.0016	PG36	24	31	47	15	56/52	47~47.4
A0107.002.0017	PG36	21	26	47	15	56/52	47~47.4
A0107.002.0018	PG42	31	40	54	20	65/62	54~54.4
A0107.002.0019	PG42	26	32	54	20	65/62	54~54.4
A0107.002.0020	PG48	32	44	59.3	20	69/65	59.3~59.7
A0107.002.0021	PG48	30	38	59.3	20	69/65	59.3~59.7

CE RoHS EASCO® PGL Type Waterproof Nylon Cable Gland (PGL型尼龙电缆防水接头)



Materials: Nylon PA66 + EPDM Rubber.
 Working Temperature: -40°C ~ +105°C. short time +160°C
 Waterproof: IP68.
 Color: White, Black, Other colors upon request.
 Fire Resistant: UL94-V2.
 材质: 尼龙PA66+EPDM橡胶.
 工作温度: -40°C至105°C, 短时可达+160°C
 防水等级: IP68.
 颜色: 白色, 黑色, 可定制其他颜色.
 阻燃等级: UL94-V2.

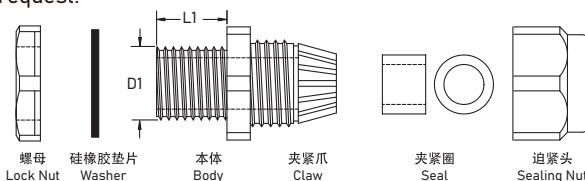


Article No.	Part No.	Cable Range 口径尺寸		Thread O.D. (D1)	Thread Length (L1)	Spanner Size	Installing Hole
货号	型号	Min Range 最小口径	Max Range 最大口径	尾部直径 (D1)	尾长 (L1)	扳手尺寸	固定孔直径
A0107.003.0001	PGL7	3	6.5	12.5	15	19/15	12.5~12.8
A0107.003.0002	PGL7	3	5.5	12.5	15	19/19	12.5~12.8
A0107.003.0003	PGL7	4	8	12.5	15	19/15	12.5~12.8
A0107.003.0004	PGL9	4	8	15.2	15	22/19	15.2~15.5
A0107.003.0005	PGL9	3	5.5	15.2	15	22/19	15.2~15.5
A0107.003.0006	PGL11	6	10	18.6	15	24/22	18.6~18.9
A0107.003.0007	PGL11	4	7	18.6	15	24/22	18.6~18.9
A0107.003.0008	PGL13.5	7	12	20.4	15	27/24	20.4~20.7
A0107.003.0009	PGL13.5	5	9	20.4	15	27/24	20.4~20.7
A0107.003.0010	PGL16	8.5	14	22.5	15	30/27	22.5~22.8
A0107.003.0011	PGL16	7	11	22.5	15	30/27	22.5~22.8
A0107.003.0012	PGL21	12	18	28.3	15	35/33	28.3~28.7
A0107.003.0013	PGL21	11	16	28.3	15	35/33	28.3~28.7
A0107.003.0014	PGL29	18	25	37	15	46/42	37~37.4
A0107.003.0015	PGL29	16	22	37	15	46/42	37~37.4
A0107.003.0016	PGL36	24	31	47	18	56/52	47~47.4
A0107.003.0017	PGL36	21	26	47	18	56/52	47~47.4
A0107.003.0018	PGL42	31	40	54	20	65/62	54~54.4
A0107.003.0019	PGL42	26	32	54	20	65/62	54~54.4
A0107.003.0020	PGL48	32	44	59.3	20	69/65	59.3~59.7
A0107.003.0021	PGL48	30	38	59.3	20	69/65	59.3~59.7

A1.
Wiring
DuctsA2.
Cable
TiesA3.
Din
RailsA4.
Cable
MarkersA5.
Cable
ClampsA6.
Wrapping
BandsA7.
Nylon
Cable GlandA8.
Metal
Cable GlandA9.
Plastic
Flexible
ConduitA10.
Metal
Flexible
ConduitA11.
TerminalA12.
Copper
Tube
TerminalsA13.
Heat
Shrinkable
TubingsA14.
Bus Bar
InsulatorsA15.
ToolA16.
Cable
ClipA17.
Insulating
NutA18.
Nylon Cable
Carrier

CE RoHS EASCO® G Type Waterproof Nylon Cable Gland (G型尼龙电缆防水接头)



Materials: Nylon PA66 + EPDM Rubber.
Working Temperature: -40°C ~ +105°C. short time +160°C
Waterproof: IP68.
Color: White, Black, Other colors upon request.
Fire Resistant: UL94-V2.
材质: 尼龙PA66+EPDM橡胶.
工作温度: -40°C至105°C, 短时可达+160°C
防水等级: IP68.
颜色: 白色, 黑色, 可定制其他颜色.
阻燃等级: UL94-V2.

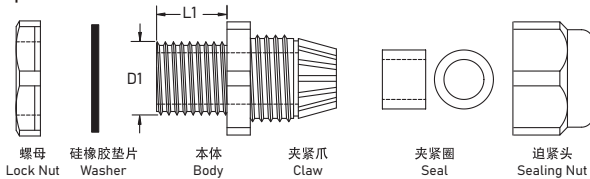


Article No.	Part No.	Cable Range 口径尺寸		Thread O.D. (D1)	Thread Length (L1)	Spanner Size	Installing Hole
货号	型号	Min Range 最小口径	Max Range 最大口径	尾部直径 (D1)	尾长 (L1)	扳手尺寸	固定孔直径
A0107.004.0001	G1/4"	4	8	13.157	9	19	13.2~13.4
A0107.004.0002	G1/4"	3	5.5	13.157	9	19	13.2~13.4
A0107.004.0003	G3/8"	6	10	16.662	10	22/22	16.7~16.9
A0107.004.0004	G3/8"	4	7	16.662	10	22/22	16.7~16.9
A0107.004.0005	G1/2"	6	12	20.955	10	27/24	21~21.2
A0107.004.0006	G1/2"	5	9	20.955	10	27/24	21~21.2
A0107.004.0007	G3/4"	12.5	18	26.441	12	33/33	26.5~26.8
A0107.004.0008	G3/4"	7	13	26.441	12	33/33	26.5~26.8
A0107.004.0009	G1"	18	25	33.2	13.5	42/41	33.3~33.6
A0107.004.0010	G1"	8	12	33.2	13.5	42/41	33.3~33.6
A0107.004.0011	G1-1/4"	24	32	41.9	15	51/50	42~42.3
A0107.004.0012	G1-1/4"	18	25	41.9	16	51/50	42~42.3

CE RoHS EASCO® NPT Type Waterproof Nylon Cable Gland (NPT型尼龙电缆防水接头)



Materials: Nylon PA66 + EPDM Rubber.
Working Temperature: -40°C ~ +105°C. short time +160°C
Waterproof: IP68.
Color: White, Black, Other colors upon request.
Fire Resistant: UL94-V2.
材质: 尼龙PA66+EPDM橡胶.
工作温度: -40°C至105°C, 短时可达+160°C
防水等级: IP68.
颜色: 白色, 黑色, 可定制其他颜色.
阻燃等级: UL94-V2.

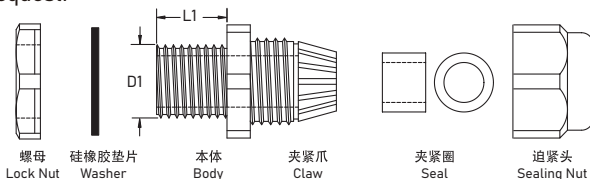


Article No.	Part No.	Cable Range 口径尺寸		Thread O.D. (D1)	Thread Length (L1)	Spanner Size	Installing Hole
货号	型号	Min Range 最小口径	Max Range 最大口径	尾部直径 (D1)	尾长 (L1)	扳手尺寸	固定孔直径
A0107.005.0001	NPT1/4"	4	8	13.157	9	19	-
A0107.005.0002	NPT1/4"	3	5.5	13.157	9	19	-
A0107.005.0003	NPT3/8"	6	10	16.662	10	22	-
A0107.005.0004	NPT3/8"	4	7	16.662	10	22	-
A0107.005.0005	NPT1/2"	6	12	20.955	10	27	-
A0107.005.0006	NPT1/2"	5	9	20.955	10	27	-
A0107.005.0007	NPT3/4"	12.5	18	26.441	15	33	-
A0107.005.0008	NPT3/4"	7	13	26.441	15	33	-
A0107.005.0009	NPT1"	18	25	33.5	17	41	-
A0107.005.0010	NPT1"	8	12	33.5	17	41	-
A0107.005.0011	NPT1-1/4"	24	32	42	17	50	-
A0107.005.0012	NPT1-1/4"	18	25	42	17	50	-

CE RoHS EASCO® Nylon Cable Gland With Strain Relief (耐扭式电缆接头)



Materials: Nylon PA66 + EPDM Rubber.
Working Temperature: -40°C ~ +105°C. short time +160°C
Waterproof: IP68.
Color: White, Black, Other colors upon request.
Fire Resistant: UL94-V2.
材质: 尼龙PA66+EPDM橡胶.
工作温度: -40°C至105°C, 短时可达+160°C
防水等级: IP68.
颜色: 白色, 黑色, 可定制其他颜色.
阻燃等级: UL94-V2.

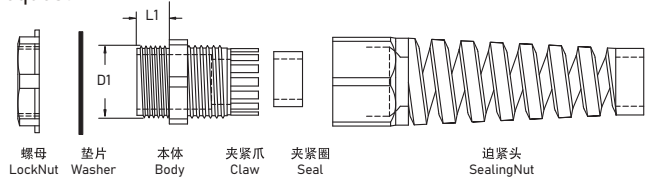


Article No.	Part No.	Cable Range 口径尺寸		Thread O.D. (D1)	Thread Length (L1)	Spanner Size	Installing Hole
货号	型号	Min Range 最小口径	Max Range 最大口径	尾部直径 (D1)	尾长 (L1)	扳手尺寸	固定孔直径
A0107.006.0001	PG7	3	6.5	12.5	8	19/15	12.5~12.8
A0107.006.0002	PG7	3	5.5	12.5	9	19/19	12.5~12.8
A0107.006.0003	PG7	4	8	12.5	9	19/19	12.5~12.8
A0107.006.0004	PG9	4	8	15.2	9	22/19	15.2~15.5
A0107.006.0005	PG9	3	5.5	15.2	9	22/19	15.2~15.5
A0107.006.0006	PG11	6	10	18.6	9	24/22	18.6~18.9
A0107.006.0007	PG11	4	7	18.6	9	24/22	18.6~18.9
A0107.006.0008	PG13.5	7	12	20.4	9	27/24	20.4~20.7
A0107.006.0009	PG13.5	5	9	20.4	9	27/24	20.4~20.7
A0107.006.0010	PG16	8.5	14	22.5	10	30/27	22.5~22.8
A0107.006.0011	PG16	7	11	22.5	10	30/27	22.5~22.8
A0107.006.0012	PG21	12	18	28.3	10	35/33	28.3~28.7
A0107.006.0013	PG21	11	16	28.3	10	35/33	28.3~28.7
A0107.006.0014	M12X1.5	4	8	12	9	19/18	12~12.3
A0107.006.0015	M12X1.5	3	6.5	12	8	18/16	12~12.3
A0107.006.0016	M12X1.5	3	5.5	12	9	19/18	12~12.3
A0107.006.0017	M16X1.5	6	10	16	9	22/22	16~16.3
A0107.006.0018	M16X1.5	4	8	16	9	22/19	16~16.3
A0107.006.0019	M16X1.5	3	5.5	16	9	22/19	16~16.3
A0107.006.0020	M18X1.5	6	10	18	9	24/22	18~18.3
A0107.006.0021	M18X1.5	4	8	18	9	24/22	18~18.3
A0107.006.0022	M20X1.5	8.5	14	20	10	27/27	20~20.3
A0107.006.0023	M20X1.5	5	11	20	10	27/27	20~20.3
A0107.006.0024	M20X1.5	7	12.5	20	9	27/24	20~20.3
A0107.006.0025	M25X1.5	12.5	18	25	10	33/33	25~25.4
A0107.006.0026	M25X1.5	7	13	25	10	33/27	25~25.4
A0107.006.0027	PG7	3	6.5	12.5	15	19/15	12.5~12.8
A0107.006.0028	PG7	3	5.5	12.5	15	19/19	12.5~12.8
A0107.006.0029	PG7	4	8	12.5	15	19/15	12.5~12.8
A0107.006.0030	PG9	4	8	15.2	15	22/19	15.2~15.5
A0107.006.0031	PG9	3	5.5	15.2	15	22/19	15.2~15.5
A0107.006.0032	PG11	6	10	18.6	15	24/22	18.6~18.9
A0107.006.0033	PG11	4	7	18.6	15	24/22	18.6~18.9
A0107.006.0034	PG13.5	7	12	20.4	15	27/24	20.4~20.7
A0107.006.0035	PG13.5	5	9	20.4	15	27/24	20.4~20.7
A0107.006.0036	PG16	8.5	14	22.5	15	30/27	22.5~22.8
A0107.006.0037	PG16	7	11	22.5	15	30/27	22.5~22.8
A0107.006.0038	PG21	12	18	28.3	15	35/33	28.3~28.7
A0107.006.0039	PG21	11	16	28.3	15	35/33	28.3~28.7
A0107.006.0040	G1/4	4	8	13.157	9	19	13.2~13.4
A0107.006.0041	G1/4	3	5.5	13.157	9	19	13.2~13.4
A0107.006.0042	G3/8	6	10	16.662	10	22/22	16.7~16.9
A0107.006.0043	G3/8	4	7	16.662	10	22/22	16.7~16.9
A0107.006.0044	G1/2	6	12	20.955	10	27/24	21~21.2

A1.
Wiring
DuctsA2.
Cable
TiesA3.
Din
RailsA4.
Cable
MarkersA5.
Cable
ClampsA6.
Wrapping
BandsA7.
Nylon
Cable GlandA8.
Metal
Cable GlandA9.
Plastic
Flexible
ConduitA10.
Metal
Flexible
ConduitA11.
TerminalA12.
Copper
Tube
TerminalsA13.
Heat
Shrinkable
TubingsA14.
Bus Bar
InsulatorsA15.
ToolA16.
Cable
ClipA17.
Insulating
NutA18.
Nylon Cable
Carrier

CE RoHS EASCO® Nylon Cable Gland With Strain Relief (耐扭式电缆接头)



Materials: Nylon PA66 + EPDM Rubber.
 Working Temperature: -40°C ~ +105°C. short time +160°C
 Waterproof: IP68.
 Color: White , Black, Other colors upon request.
 Fire Resistant: UL94-V2.
 材质: 尼龙PA66+EPDM橡胶.
 工作温度: -40°C至105°C, 短时可达+160°C
 防水等级: IP68.
 颜色: 白色, 黑色, 可定制其他颜色.
 阻燃等级: UL94-V2.

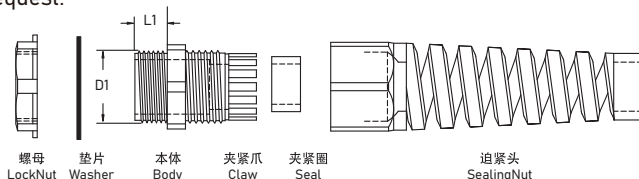


Article No.	Part No.	Cable Range 口径尺寸		Thread O.D. (D1)	Thread Length (L1)	Spanner Size	Installing Hole
货号	型号	Min Range 最小口径	Max Range 最大口径	尾部直径 (D1)	尾长 (L1)	扳手尺寸	固定孔直径
A0107.006.0045	G1/2	5	9	20.955	10	27/24	21~21.2
A0107.006.0046	G3/4	12.5	18	26.441	12	33/33	26.5~26.8
A0107.006.0047	G3/4	7	13	26.441	12	33/33	26.5~26.8
A0107.006.0048	M12X1.5	3	6.5	12	15	18/16	12~12.3
A0107.006.0049	M12X1.5	3	5.5	12	15	19/18	12~12.3
A0107.006.0050	M16X1.5	4	8	16	15	22/19	16~16.3
A0107.006.0051	M16X1.5	6	10	16	15	22/22	16~16.3
A0107.006.0052	M16X1.5	3	5.5	16	15	22/19	16~16.3
A0107.006.0053	M18X1.5	6	10	18	15	24/22	18~18.3
A0107.006.0054	M18X1.5	3	7	18	15	24/19	18~18.3
A0107.006.0055	M20X1.5	8.5	14	20	15	27/27	20~20.3
A0107.006.0056	M20X1.5	7	12.5	20	15	27/24	20~20.3
A0107.006.0057	M20X1.5	5	10	20	15	27/24	20~20.3
A0107.006.0058	M25X1.5	12.5	18	25	15	33/33	25~25.4
A0107.006.0059	M25X1.5	9	16	25	15	33/33	25~25.4
A0107.006.0060	NPT1/4	4	8	13.157	9	19	-
A0107.006.0061	NPT1/4	3	5.5	13.157	9	19	-
A0107.006.0062	NPT3/8	6	10	16.662	10	22	-
A0107.006.0063	NPT3/8	4	7	16.662	10	22	-
A0107.006.0064	NPT1/2	6	12	20.955	10	27	-
A0107.006.0065	NPT1/2	5	9	20.955	10	27	-
A0107.006.0066	NPT3/4	12.5	18	26.441	15	33	-
A0107.006.0067	NPT3/4	7	13	26.441	15	33	-
A0107.006.0068	NPT1	18	25	33.5	17	41	-
A0107.006.0069	NPT1	8	12	33.5	17	41	-
A0107.006.0070	NPT1-1/4	24	32	42	17	50	-
A0107.006.0071	NPT1-1/4	18	25	42	17	50	-

CE RoHS EASCO® Sealing Plug (尼龙闷盖)



Materials: Nylon PA66.
Color: White , Black, Other colors upon request.
Fire Resistant: UL94-V2.
材质: 尼龙PA66
颜色: 白色, 黑色, 可定制其他颜色.
阻燃等级: UL94-V2.



Article No.	Part No.	Thread O.D.(C1)	Sealing Nut O.D(D)	Thread Length(C2)
货号	型号	尾部直径 (C1)	闷盖外径 (D)	尾长 (C2)
A0107.007.0001	M12X1.5	12	15	8
A0107.007.0002	M16X1.5	16	20	8
A0107.007.0003	M18X1.5	18	22	8
A0107.007.0004	M20X1.5	20	25	9
A0107.007.0005	M22X1.5	22	27	10
A0107.007.0006	M24X1.5	24	29	9
A0107.007.0007	M25X1.5	25	30	10
A0107.007.0008	M27X2.0	27	33	10
A0107.007.0009	M30X2.0	30	35	11
A0107.007.0010	M32X1.5	32	39	11
A0107.007.0011	M36X2.0	36	44	11
A0107.007.0012	M40X1.5	40	46	12
A0107.007.0013	M48X2.0	48	55	11
A0107.007.0014	M50X1.5	50	57	11
A0107.007.0015	M63X1.5	63	70	12
A0107.007.0016	PG7	12.5	15	8
A0107.007.0017	PG9	15.2	19	8
A0107.007.0018	PG11	18.6	22	8
A0107.007.0019	PG13.5	20.4	25	9
A0107.007.0020	PG16	22.5	27	10
A0107.007.0021	PG21	28.3	33	11
A0107.007.0022	PG29	37	44	11
A0107.007.0023	PG36	47	55	11
A0107.007.0024	PG42	54	62	11
A0107.007.0025	PG48	59.3	69	12

- A1. Wiring Ducts
- A2. Cable Ties
- A3. Din Rails
- A4. Cable Markers
- A5. Cable Clamps
- A6. Wrapping Bands
- A7. Nylon Cable Gland
- A8. Metal Cable Gland
- A9. Plastic Flexible Conduit
- A10. Metal Flexible Conduit
- A11. Terminal
- A12. Copper Tube Terminals
- A13. Heat Shrinkable Tubings
- A14. Bus Bar Insulators
- A15. Tool
- A16. Cable Clip
- A17. Insulating Nut
- A18. Nylon Cable Carrier

CE RoHS

EASCO® 90 Degree Waterproof Nylon Cable Gland Split EASCO® 90度尼龙电缆防水接头(分体)



Materials: Nylon PA66 + EPDM Rubber.

Working temperature: -40°C to 100°C in static state, or instantaneous heat resistance up to 120°C;
-20°C to 80°C in dynamic state, or instantaneous heat resistance up to 100°C

Thread: Metric. PG. G (PF/BSP/PS). and NPT thread.

Features: The claws and seals of excellent design. Sealing nut have a "click" sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water, weak acid, alcohol, oil, grease and common solvency.

Color: Black (RAL9005). Gray (RAL7035). Other color available upon request.

Waterproof: IP68-10 Bar.

材质: 尼龙PA66+EPDM橡胶.

螺牙规格: 公制牙 (Metric) PG牙, G (PF/BSP/PS)牙, NPT牙.

工作温度: 静态 -40°C至 100 或瞬间可耐热至 120 ;动态 -20 至 80°C, 或瞬间可耐热至 100°C。

产品特性: 特殊夹紧爪与夹紧圈之设计, 夹紧电缆范围大, 抗拉力特强, 可防水、防尘、抗盐、耐弱酸、酒精、油、油脂 及一般溶剂。
颜色种类: 黑色、灰色, 其它颜色可定做。

防护等级: IP68-10

Article No.	Part No.	Thread	Cable Range	Thread O.D.	Thread Length	Spanner Size	Pkg Qty (pcs)
货号	型号	螺牙规格	电缆范围	螺纹外径	螺纹长度	扳手直径	包装数 (个)
A0107.008.0001	M16A-E-06	M16X1.5	4-7	16	15	22/22	50
A0107.008.0002	M16A-E-08	M16X1.5	5-8	16	15	22/22	50
A0107.008.0003	M16A-E-10	M16X1.5	6-10	16	15	22/22	50
A0107.008.0004	M20A-E-11	M20X1.5	6-11	20	15	27/27	50
A0107.008.0005	M20A-E-14	M20X1.5	8-14	20	15	27/27	50
A0107.008.0006	M25A-E-16	M25X1.5	12-16	25	15	33/39	50
A0107.008.0007	M25A-E-18	M25X1.5	14-18	25	15	33/39	50
A0107.008.0008	M32A-E-22	M32X1.5	16-22	32	15	41/45	20
A0107.008.0009	M32A-E-25	M32X1.5	18-25	32	15	41/45	20
A0107.008.0010	M40A-E-26	M40X1.5	20-26	40	20	50/55	12
A0107.008.0011	M40A-E-31	M40X1.5	23-31	40	20	50/55	12
A0107.008.0012	PG16A-E-10	PG16	6-10	22.5	12	30/37	50
A0107.008.0013	PG16A-E-14	PG16	8-14	22.5	12	30/37	50
A0107.008.0014	G(PF)1/2-E-10	G(PF)1/2	6-10	20.955	12	27/27	50
A0107.008.0015	G(PF)1/2-E-14	G(PF)1/2	8-14	20.955	12	27/27	50
A0107.008.0016	G(PF)3/4-E-16	G(PF)3/4	12-16	26.441	15	33/39	50
A0107.008.0017	G(PF)3/4-E-18	G(PF)3/4	14-18	26.441	15	33/39	50
A0107.008.0018	G(PF)1-E-22	G(PF)1	16-22	33.249	15	42/45	50
A0107.008.0019	G(PF)1-E-25	G(PF)1	18-25	33.249	15	42/45	50
A0107.008.0020	G(PF)1 1/4-E-28	G(PF)1 1/4	20-28	41.91	20	53/55	20
A0107.008.0021	G(PF)1 1/4-E-32	G(PF)1 1/4	23-32	41.91	20	53/55	20
A0107.006.0022	M20X1.5	8.5	14	20	10	27/27	20~20.3

CE RoHS EASCO® Nylon Cable Porous Joint (Split Type) (尼龙电缆多孔接头(分体型))



Materials: Nylon PA66 + EPDM Rubber.
Working temperature: -40°C to 100°C in static state . or instantaneous heat resistance up to 120°C;
-20°C to 80°C in dynamic state, or instantaneous heat resistance up to 100°C


Thread: Metric. PG. G (PF). and NPT thread.
Color: Black(RAL9005).Gray(RAL7035).other color available upon request.
Waterproof: IP68-10 Bar.

Features: The claws and seals of excel lent design.sealing nut have a"click"sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water. weak acid, alcohol. oil.grease and common solvency.

材质: 尼龙PA66+EPDM橡胶.
螺牙规格: 公制牙 (Metric) PG牙、G (PF)牙、NPT牙。
工作温度: 静态 -40°C至 100 或瞬间可耐热至 120 ;
动态 -20 至 80°C, 或瞬间可耐热至100°C。
颜色种类: 黑色、灰色, 其它颜色可定做。

防护等级: P68-10

产品特性: 特殊夹紧爪与夹紧圈之设计, 夹紧电缆范围大, 抗拉力特强, 可防水、防尘、抗盐、耐弱酸、酒精、油、油脂 及一般溶剂。

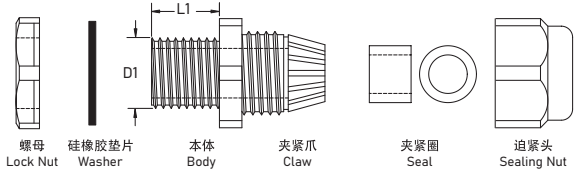

Article No.	Part No.	Thread	Porous Spec	Cable Range	Thread O.D.	Thread Length	Spanner Size	Pkg Qty (pcs)
货号	型号	螺牙规格	多孔规格	电缆范围	螺纹外径	螺纹长度	扳手直径	包装数 (个)
A0107.009.0001	M12A-H2-03	M12	2 孔 2 Holes	3-1.2	12	9	18/19	50
A0107.009.0002	M16A-H2-04	M16		4-1.6	16	15	22/22	50
A0107.009.0003	M20A-H2-03	M20		3.5-2	20	15	27/27	50
A0107.009.0004	M20A-H2-06	M20		6-2.5	20	15	27/27	50
A0107.009.0005	M25A-H2-05	M25		5-2	25	15	33/33	50
A0107.009.0006	M25A-H2-08	M25	3 孔 3 Holes	8.7-4.5	25	15	33/33	50
A0107.009.0007	M32-H2-10	M32		10-5	32	15	41/41	50
A0107.009.0008	M12A-H3-02	M12		2.6-1.2	12	9	18/19	20
A0107.009.0009	M16A-H3-4	M16		4.1.6	16	15	22/22	20
A0107.009.0010	M20A-H3-3	M20		3.5-1.5	20	15	27/27	12
A0107.009.0011	M20A-H3-5	M20	4 孔 4 Holes	5-2	20	15	27/27	12
A0107.009.0012	M25A-H3-5	M25		5-2	25	15	33/33	50
A0107.009.0013	M25A-H3-8	M25		8-4	25	15	33/33	50
A0107.009.0014	M32A-H3-10	M32		10-5	32	15	41/41	50
A0107.009.0015	M12A-H4-2	M12		2.3-1	12	9	18/19	50
A0107.009.0016	M16A-H4-3	M16	5 孔 5 Holes	3-1.2	16	15	22/22	50
A0107.009.0017	M20A-H4-3	M20		3.5-1.5	20	15	27/27	50
A0107.009.0018	M20A-H4-4	M20		4.5-2	20	15	27/27	50
A0107.009.0019	M25A-H4-5	M25		5-2	25	15	33/33	50
A0107.009.0020	M25A-H4-7	M25		7-3.5	25	15	33/33	20
A0107.009.0021	M32-H4-9	M32	6 孔 6 Holes	9-4.5	32	15	41/41	20
A0107.009.0022	M16A-H5-02	M16		2.5-1	16	15	22/22	20~20.3
A0107.009.0023	M20A-H5-3	M20		3-1.2	20	15	27/27	20~20.3
A0107.009.0024	M20A-H5-4	M20		4.2-1.7	20	15	27/27	20~20.3
A0107.009.0025	M25A-H5-3	M25		3.5-1.5	25	15	33/33	25~25.4
A0107.009.0026	M25A-H5-6	M25	7 孔 7 Holes	6-3	25	15	33/33	25~25.4
A0107.009.0027	M32A-H5-8	M32		8-4	32	15	41/41	12.5~12.8
A0107.009.0028	M16-H6-2	M16		2-1	16	15	22/22	12.5~12.8
A0107.009.0029	M20A-H6-3	M20		3-1.2	20	15	27/27	12.5~12.8
A0107.009.0030	M25A-H6-3	M25		3.5-1.5	25	15	33/33	15.2~15.5
A0107.009.0031	25A-H6-5	M25	8 孔 8 Holes	5.3-2.4	25	15	33/33	15.2~15.5
A0107.009.0032	M32A-H6-7	M32		7-3.5	32	15	41/41	18.6~18.9
A0107.009.0033	M20A-H7-3	M20		3-1.2	20	15	27/27	18.6~18.9
A0107.009.0034	M25-H7-3	M25		3.5-1.5	25	15	33/33	20.4~20.7
A0107.009.0035	M32A-H7-6	M32		6-3	32	15	41/41	20.4~20.7
A0107.009.0036	M20A-H8-2	M20	8 孔 8 Holes	2.8-1	20	15	27/27	22.5~22.8
A0107.009.0037	M25A-H8-3	M25		3.5-1.5	25	15	33/33	22.5~22.8

A1.
Wiring
Ducts

A2.
Cable
Ties

A3.
Din
Rails

A4.
Cable
Markers

A5.
Cable
Clamps

A6.
Wrapping
Bands

A7.
Nylon
Cable Gland

A8.
Metal
Cable Gland

A9.
Plastic
Flexible
Conduit

A10.
Metal
Flexible
Conduit

A11.
Terminal

A12.
Copper
Tube
Terminals

A13.
Heat
Shrinkable
Tubings

A14.
Bus Bar
Insulators

A15.
Tool

A16.
Cable
Clip

A17.
Insulating
Nut

A18.
Nylon Cable
Carrier

CE RoHS EASCO® Nylon Cable Porous Joint (Split Type) (尼龙电缆多孔接头(分体型))



Materials: Nylon PA66 + EPDM Rubber.
Working temperature: -40°C to 100°C in static state . or instantaneous heat resistance up to 120°C;
-20°C to 80°C in dynamic state, or instantaneous heat resistance up to 100°C


Thread: Metric. PG. G (PF). and NPT thread.
Color: Black(RAL9005).Gray(RAL7035).other color available upon request.

Waterproof: IP68-10 Bar.

Features: The claws and seals of excel lent design.sealing nut have a"click"sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water. weak acid, alcohol. oil.grease and common solvency.

材质: 尼龙PA66+EPDM橡胶.
螺牙规格:公制牙 (Metric) PG牙、G (PF)牙、NPT牙。
工作温度:静态 -40°C至 100 或瞬间可耐热至 120 ;
动态-20 至 80°C,或瞬间可耐热至100°C。
颜色种类:黑色、灰色, 其它颜色可定做。
防护等级:P68-10

产品特性:特殊夹紧爪与夹紧圈之设计, 夹紧电缆范围大,
抗拉力特强, 可防水、防尘、抗盐、耐弱酸、酒精、油、油脂 及一般溶剂。

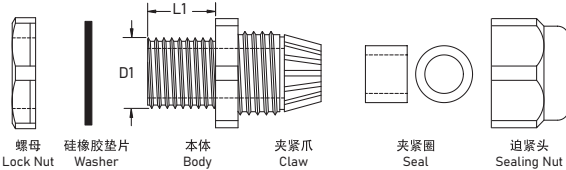

Article No.	Part No.	Thread	Porous Spec	Cable Range	Thread O.D.	Thread Length	Spanner Size	Pkg Qty (pcs)
货号	型号	螺牙规格	多孔规格	电缆范围	螺纹外径	螺纹长度	扳手直径	包装数 (个)
A0107.009.0038	M16A-0610	M16	 扁孔 Flat Hole	6*10	16	15	22/22	50
A0107.009.0039	M20A-06128	M20		6.5*12	20	15	27/27	50
A0107.009.0040	M20A-06148	M20		6*14	20	15	27/27	50
A0107.009.0041	M20A-07128	M20		7*12	20	15	27/27	50
A0107.009.0042	M20A-07148	M20		7*14	20	15	27/27	50
A0107.009.0043	M25A-06148	M25		6*14	25	15	33/33	50
A0107.009.0044	M25A-0714	M25		7*14	25	15	33/33	50
A0107.009.0045	M32A-0822	M32		8*22	32	15	41/41	20
A0107.009.0046	M40A-10288	M40		10*28.5	40	20	50/50	10
A0107.009.0047	M40A-0529	M40		5.5*29	40	20	50/50	10

CE RoHS EASCO® Nylon Cable Waterproof Joint (Connected) (尼龙电缆防水接头(连体))



Materials: Nylon PA66 + EPDM Rubber.

Working temperature: -40°C to 100°C in static state . or instantaneous heat resistance up to 120°C;
-20°C to 80°C in dynamic state, or instantaneous heat resistance up to 100°C

Thread: Metric. PG. G (PF/BSP/PS). and NPT thread.

Color: Black(RAL9005).Gray(RAL7035).other color available upon request.

Waterproof: IP68-10 Bar.

Features: The claws and seals of excel lent design.sealing nut have a"click"sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water. weak acid, alcohol. oil.grease and common solvency.

材质: 尼龙PA66+EPDM橡胶.

螺牙规格: 公制牙 (Metric) PG牙, G (PF/BSP/PS)牙, NPT牙。


工作温度: 静态 -40°C至 100 或瞬间可耐热至 120 ;

动态 -20 至 80°C, 或瞬间可耐热至100°C。

颜色种类: 黑色、灰色、其它颜色可定做。

防护等级: P68-10

产品特性: 特殊夹紧爪与夹紧圈之设计, 夹紧电缆范围大, 抗拉力特强, 可防水、防尘、抗盐、耐弱酸、酒精、油、油脂 及一般溶剂。

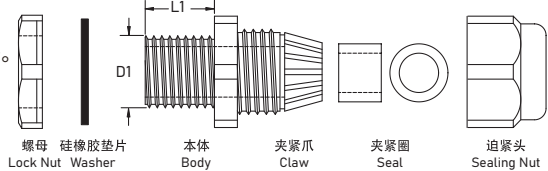

Article No.	Part No.	Thread	Cable Range	Thread O.D.	Thread Length	Spanner Size	Pkg Qty (pcs)
货号	型号	螺牙规格	电缆范围	螺纹外径	螺纹长度	扳手直径	包装数 (个)
A0107.010.0001	PG7S-6.5	PG7	3-6.5	12.5	8	17/15	50
A0107.010.0002	PG7-5.5	PG7	3-5.5	12.5	8	17/19	50
A0107.010.0003	PG7L-5.5	PG7	3-5.5	12.5	15	17/19	50
A0107.010.0004	PG7-8	PG7	4-8	12.5	8	17/19	50
A0107.010.0005	PG7L-8	PG7	4-8	12.5	15	17/19	50
A0107.010.0006	PG9-5.5	PG9	3-5.5	15.2	8.2	22/19	50
A0107.010.0007	PG9L-5.5	PG9	3-5.5	15.2	15	22/19	50
A0107.010.0008	PG9-8	PG9	4-8	15.2	8.2	22/19	50
A0107.010.0009	PG9L-8	PG9	4-8	15.2	15	22/19	50
A0107.010.0010	PG11-7	PG11	4-7	18.6	10	24/22	50
A0107.010.0011	PG11L-7	PG11	4-7	18.6	15	24/22	50
A0107.010.0012	PG11-10	PG11	6-10	18.6	10	24/22	50
A0107.010.0013	PG11L-10	PG11	6-10	18.6	15	24/22	50
A0107.010.0014	PG13.5-9	PG13.5	5-9	20.4	10	27/24	50
A0107.010.0015	PG13.5L-9	PG13.5	5-9	20.4	15	27/24	50
A0107.010.0016	PG13.5-12.5	PG13.5	6-12.5	20.4	10	27/24	50
A0107.010.0017	PG13.5L-12.5	PG13.5	6-12.5	20.4	15	27/24	50
A0107.010.0018	PG16-11	PG16	6-11	22.5	10.8	30/27	50
A0107.010.0019	PG16L-11	PG16	6-11	22.5	15	30/27	50
A0107.010.0020	PG16-14	PG16	8.5-14	22.5	10.8	30/27	50
A0107.010.0021	PG16L-14	PG16	8.5-14	22.5	15	30/27	50
A0107.010.0022	PG19-11	PG19	6-11	24	11	36/33	50
A0107.010.0023	PG19L-11	PG19	6-11	24	15	36/33	50
A0107.010.0024	PG19-14	PG19	8.5-14	24	11	36/33	50
A0107.010.0025	PG19L-14	PG19	8.5-14	24	15	36/33	50
A0107.010.0026	PG21-13	PG21	7-13	28.3	12	36/33	50
A0107.010.0027	PG21L-13	PG21	7-13	28.3	15	36/33	50
A0107.010.0028	PG21-18	PG21	13-18	28.3	12	36/33	50
A0107.010.0029	PG21L-18	PG21	13-18	28.3	15	36/33	50
A0107.010.0030	PG25-20	PG25	14-20	30	13	36/37	30
A0107.010.0031	PG25L-20	PG25	14-20	30	15	36/37	30
A0107.010.0032	PG29-21	PG29	14-22	37	12	46/41	20
A0107.010.0033	PG29L-21	PG29	14-22	37	15	46/41	20
A0107.010.0034	PG29-25	PG29	17-25	37	12	46/41	20
A0107.010.0035	PG29L-25	PG29	17-25	37	15	46/41	20
A0107.010.0036	PG36-25.5	PG36	17-25.5	47	14	57/52	12
A0107.010.0037	PG36-31	PG36	24-32	47	14	57/52	12
A0107.010.0038	PG42-32	PG42	25-32	54	15	64/62	10
A0107.010.0039	PG42-41	PG42	30-41	54	15	64/62	10
A0107.010.0040	PG48-38	PG48	29-38	59.3	18	70/65	10

A1.
Wiring
DuctsA2.
Cable
TiesA3.
Din
RailsA4.
Cable
MarkersA5.
Cable
ClampsA6.
Wrapping
BandsA7.
Nylon
Cable GlandA8.
Metal
Cable GlandA9.
Plastic
Flexible
ConduitA10.
Metal
Flexible
ConduitA11.
TerminalA12.
Copper
Tube
TerminalsA13.
Heat
Shrinkable
TubingsA14.
Bus Bar
InsulatorsA15.
ToolA16.
Cable
ClipA17.
Insulating
NutA18.
Nylon Cable
Carrier

CE RoHS EASCO® Nylon Cable Waterproof Joint (Connected) (尼龙电缆防水接头(连体))



Materials: Nylon PA66 + EPDM Rubber.

Working temperature: -40°C to 100°C in static state . or instantaneous heat resistance up to 120°C;

-20°C to 80°C in dynamic state, or instantaneous heat resistance up to 100°C

Thread: Metric. PG. G (PF/BSP/PS). and NPT thread.

Color: Black(RAL9005).Gray(RAL7035).other color available upon request.

Waterproof: IP68-10 Bar.

Features: The claws and seals of excel lent design.sealing nut have a"click"sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water. weak acid, alcohol. oil.grease and common solvency.

材质: 尼龙PA66+EPDM橡胶.

螺牙规格:公制牙 (Metric) PG牙、G (PF/BSP/PS)牙、NPT牙。


工作温度:静态 -40°C至 100 或瞬间可耐热至 120 ;

动态-20 至 80°C,或瞬间可耐热至100°C。

颜色种类:黑色、灰色、其它颜色可定做。

防护等级:P68-10

产品特性:特殊夹紧爪与夹紧圈之设计,夹紧电缆范围大,抗拉力特强,可防水、防尘、抗盐、耐弱酸、酒精、油、油脂 及一般溶剂。

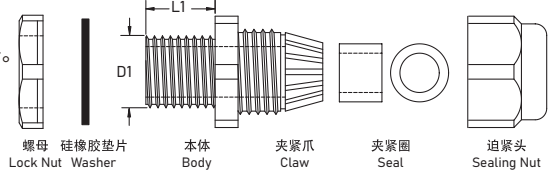

Article No.	Part No.	Thread	Cable Range	Thread O.D.	Thread Length	Spanner Size	Pkg Qty (pcs)
货号	型号	螺牙规格	电缆范围	螺纹外径	螺纹长度	扳手直径	包装数 (个)
A0107.010.0041	PG48-45.5	PG48	35-45.5	59.3	18	70/65	10
A0107.010.0042	M8-4.5	M8	2-4.5	8	7.5	13/12	50
A0107.010.0043	M10-6	M10	3-6	10	8	15/13	50
A0107.010.0044	M12S-6.5	M12S	3-6.5	12	8.5	18/15	50
A0107.010.0045	M12SL- 6.5	M12S	3-6.5	12	15	18/15	50
A0107.010.0046	M12-5	M12	3-5	12	8.5	18/19	50
A0107.010.0047	M12-8	M12	4-8	12	8.5	18/19	50
A0107.010.0048	M12L-5	M12	3-5	12	15	18/19	50
A0107.010.0049	M12L-8	M12	4-8	12	15	18/19	50
A0107.010.0050	M16S-8	M16	4-8	16	10	22/19	50
A0107.010.0051	M16SL-8	M16	4-8	16	15	22/19	50
A0107.010.0052	M16-7	M16	4-7	16	10	22/22	50
A0107.010.0053	M16-10	M16	6-10	16	10	22/22	50
A0107.010.0054	M16L-7	M16	4-7	16	15	22/22	50
A0107.010.0055	M16L-10	M16	6-10	16	15	22/22	50
A0107.010.0056	M18-7	M18	4-7	18	10	24/22	50
A0107.010.0057	M18-10	M18	6-10	18	10	24/22	50
A0107.010.0058	M18L-7	M18	4-7	18	15	24/22	50
A0107.010.0059	M18L-10	M18	6-10	18	15	24/22	50
A0107.010.0060	M20S-9	M20	5-9	20	10	27/24	50
A0107.010.0061	M20S-12	M20	7-12	20	10	27/24	50
A0107.010.0062	M20-11	M20	6-11	20	10	27/27	50
A0107.010.0063	M20-14	M20	8.5-14	20	10	27/27	50
A0107.010.0064	M20L-11	M20	6-11	20	15	27/27	50
A0107.010.0065	M20L-14	M20	8.5-14	20	15	27/27	50
A0107.010.0066	M22-11	M22	6-11	22	11	27/27	50
A0107.010.0067	M22-14	M22	8.5-14	22	11	27/27	50
A0107.010.0068	M24-11	M24	6-11	24	11	27/27	50
A0107.010.0069	M24-14	M24	8.5-14	24	11	27/27	50
A0107.010.0070	M25S-14	M25	8.5-14	25	11.6	33/27	50
A0107.010.0071	M25-13	M25	7-13	25	11.6	33/27	50
A0107.010.0072	M25-18	M25	12.5-18	25	11.6	33/27	50
A0107.010.0073	M25L-13	M25	7-13	25	15	33/33	50
A0107.010.0074	M25L-18	M25	12.5-18	25	15	33/33	50
A0107.010.0075	M32S-18	M32	12.8-18	32	15	36/42	20
A0107.010.0076	M32-22	M32	15-22	32	15	41/42	20
A0107.010.0077	M32-25	M32	18-25	32	15	41/42	20
A0107.010.0078	M36-22	M36	15-22	36	12	45/42	20
A0107.010.0079	M36-25	M36	18-25	36	12	45/42	20
A0107.010.0080	M40-25	M40	18-25	40	15	50/52	10

CE RoHS EASCO® Nylon Cable Waterproof Joint (Connected) (尼龙电缆防水接头(连体))



Materials: Nylon PA66 + EPDM Rubber.

Working temperature: -40°C to 100°C in static state . or instantaneous heat resistance up to 120°C;
-20°C to 80°C in dynamic state, or instantaneous heat resistance up to 100°C

Thread: Metric. PG. G (PF/BSP/PS). and NPT thread.

Color: Black(RAL9005).Gray(RAL7035).other color available upon request.

Waterproof: IP68-10 Bar.

Features: The claws and seals of excel lent design.sealing nut have a"click"sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water. weak acid, alcohol. oil.grease and common solvency.

材质: 尼龙PA66+EPDM橡胶.

螺牙规格: 公制牙 (Metric) PG牙. G (PF/BSP/PS)牙. NPT牙.


工作温度: 静态 -40°C至 100 或瞬间可耐热至 120 ;

动态 -20 至 80°C, 或瞬间可耐热至100°C.

颜色种类: 黑色、灰色、其它颜色可定做。

防护等级: P68-10

产品特性: 特殊夹紧爪与夹紧圈之设计, 夹紧电缆范围大, 抗拉力特强, 可防水、防尘、抗盐、耐弱酸、酒精、油、油脂 及一般溶剂。

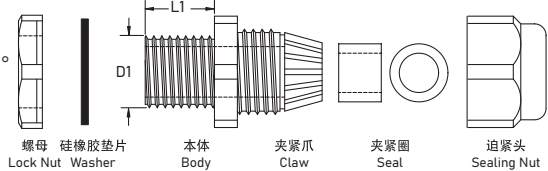

Article No.	Part No.	Thread	Cable Range	Thread O.D.	Thread Length	Spanner Size	Pkg Qty (pcs)
货号	型号	螺牙规格	电缆范围	螺纹外径	螺纹长度	扳手直径	包装数 (个)
A0107.010.0081	M40-32	M40	24-32	40	15	50/52	10
A0107.010.0082	M50-32	M50	24-32	50	15	62/62	10
A0107.010.0083	M50-41	M50	31-41	50	15	62/62	10
A0107.010.0084	M63-41	M63	31-41	63	18	75/75	10
A0107.010.0085	M63- 46	M63	35-46	63	18	75/75	10
A0107.010.0086	G1/4-5	G1/4	3-5.3	13.157	8.5	19/19	50
A0107.010.0087	G1/4-8	G1/4	4-8	13.157	8.5	19/19	50
A0107.010.0088	G3/8-7	G3/8	4-7	16.662	10	22/22	50
A0107.010.0089	G3/8-10	G3/8	6-10	16.662	10	22/22	50
A0107.010.0090	G1/2-9	G1/2	5-9	20.995	10	27/24	50
A0107.010.0091	G1/2-12.5	G1/2	7-12.5	20.995	10	27/24	50
A0107.010.0092	G3/4-13	G3/4	7-13	26.441	12	36/33	50
A0107.010.0093	G1-21	G1	15-22	33.249	15	46/41	20
A0107.010.0094	G1-24	G1	17-25	33.249	15	46/41	10
A0107.010.0095	G11/4-25.5	G11/4	17-25.5	41.91	15	57/52	10
A0107.010.0096	G11/4-31	G11/4	30-41	41.91	15	57/52	10
A0107.010.0097	G11/2-25.5	G11/2	17-25.5	48	15	60/62	10
A0107.010.0098	G11/2-31	G11/2	24-32	48	15	60/62	10
A0107.010.0099	G2-46	G2	38-46	60	18	60/62	10
A0107.010.0100	G2-51	G2	46-51	60	18	-	10
A0107.010.0101	NPT1/4-5.5	NPT1/4	3-5.5	13.157	8.5	19	50
A0107.010.0102	NPT1/4-8	NPT1/4	4-8	13.157	8.5	19	50
A0107.010.0103	NPT3/8-7	NPT3/8	3-7	16.662	10	22	50
A0107.010.0104	NPT3/8-10	NPT3/8	6-10	16.662	10	22	50
A0107.010.0105	NPT1/2-9	NPT1/2	5-9	20.955	10	24	50
A0107.010.0106	NPT1/2-13	NPT1/2	7-13	20.955	10	24	50
A0107.010.0107	NPT3/4-13	NPT 3/4	7-13	26.441	15	33	20
A0107.010.0108	NPT3/4-18	NPT 3/4	13-18	26.441	15	33	20
A0107.010.0109	NPT1-22	NPT1	15-22	33.249	15	41	10
A0107.010.0110	NPT1-25	NPT1	18-25	33.249	15	41	10
A0107.010.0111	NPT11/4-25.5	NPT11/4	18-25.5	41.91	15	52	10
A0107.010.0112	NPT11/4-31	NPT11/4	25-32	41.91	15	52	10